

ALUMINUM ELECTROLYTIC CAPACITORS


- High stability
- Lug type
- Low leakage current reduces battery consumption
- Used for photo flash

■ SPECIFICATIONS

| Item | Characteristics | |
|-----------------------------------|---|----------------|
| Operating Temperature Range(°C) | -20~+55 | |
| Rated Voltage | 330VV.DC | 360VV.DC |
| Voltage Proof | 350SV.DC | 390SV.DC |
| Nominal capacitance range (μF) | 150~1500 | |
| Capacitance Tolerance(20°C,120Hz) | -10%~+20% | |
| Dissipation Factor(20°C,120Hz) | Capacitance:150~600μF | Less than 0.1 |
| | 601~1500μF | Less than 0.15 |
| Leakage current | I=1XC(at 20°C, 5minues)Max I: Leakage Current (μA) C: Nominal Capacitance (μF) | |

■ DIMENSIONS

MM

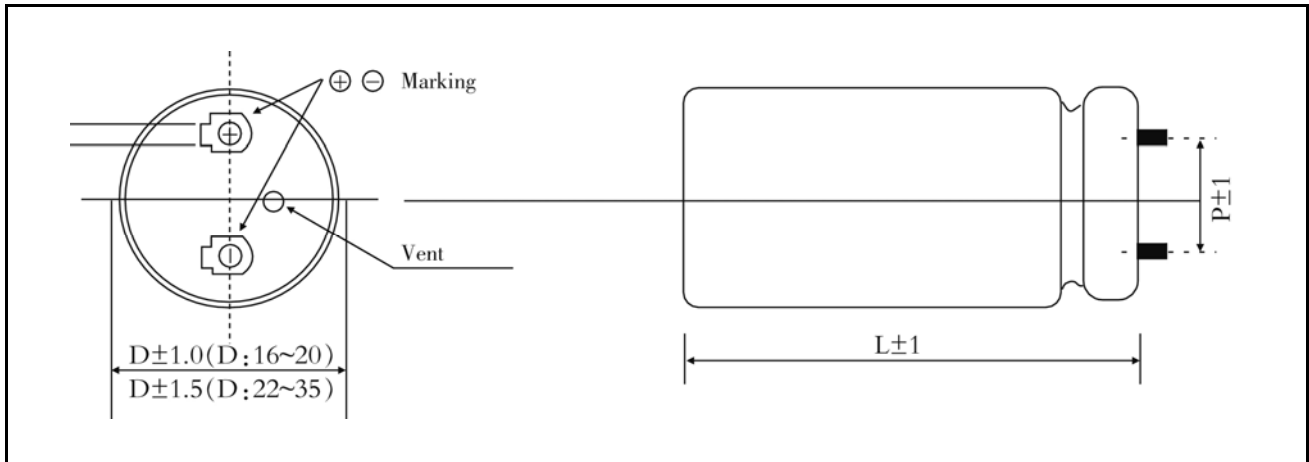

■ STANDARD RATINGS

● 330WV.DC(350SV.DC)

| Capacitance | ΦD (mm) | 16 | 18 | 20 | 22 | 25 | 30 | 35 |
|-------------|---------|-----|-----|-----|-----|------|------|------|
| (μ F) | P | 6.0 | 6.0 | 8.0 | 8.0 | 10.0 | 10.0 | 10.0 |
| 150 | L (mm) | 28 | 23 | - | - | - | - | - |
| 180 | | 32 | 23 | - | - | - | - | - |
| 200 | | 35 | 28 | 24 | - | - | - | - |
| 250 | | 42 | 35 | 29 | 26 | - | - | - |
| 300 | | 48 | 40 | 33 | 28 | - | - | - |
| 350 | | 56 | 45 | 38 | 31 | - | - | - |
| 400 | | - | 48 | 42 | 35 | 30 | - | - |
| 450 | | - | 56 | 45 | 38 | 32 | - | - |
| 500 | | - | - | 48 | 42 | 34 | - | - |
| 600 | | - | - | 56 | 48 | 40 | 31 | - |
| 700 | | - | - | - | 56 | 44 | 34 | - |
| 800 | | - | - | - | - | 50 | 38 | - |
| 900 | | - | - | - | - | 54 | 42 | - |
| 1000 | | - | - | - | - | 58 | 44 | 36 |
| 1200 | | - | - | - | - | - | 54 | 43 |
| 1300 | | - | - | - | - | - | 58 | 45 |
| 1500 | - | - | - | - | - | 64 | 51 | |

● 360WV.DC(390SV.DC)

| Capacitance | ΦD(mm) | 16.0 | 18.0 | 20.0 | 22.0 | 25.0 | 30.0 | 35.0 |
|-------------|--------|------|------|------|------|------|------|------|
| (μF) | P | 6.0 | 6.0 | 8.0 | 8.0 | 10.0 | 10.0 | 10.0 |
| 150 | L(mm) | 35 | 28 | 24 | - | - | - | - |
| 180 | | 40 | 32 | 28 | - | - | - | - |
| 200 | | 45 | 35 | 30 | 26 | - | - | - |
| 250 | | 52 | 42 | 35 | 30 | - | - | - |
| 300 | | - | 48 | 40 | 35 | 30 | - | - |
| 350 | | - | - | 45 | 40 | 32 | - | - |
| 400 | | - | - | 52 | 42 | 35 | - | - |
| 450 | | - | - | - | 48 | 40 | - | - |
| 500 | | - | - | - | 56 | 44 | 34 | - |
| 600 | | - | - | - | - | 50 | 38 | - |
| 700 | | - | - | - | - | 58 | 44 | - |
| 800 | | - | - | - | - | - | 50 | 38 |
| 900 | | - | - | - | - | - | 54 | 43 |
| 1000 | | - | - | - | - | - | 58 | 48 |
| 1200 | | - | - | - | - | - | 70 | 55 |
| 1300 | | - | - | - | - | - | - | 59 |
| 1500 | - | - | - | - | - | - | 71 | |

■ The specific capacitance and case size are available on request.