

## Features


- ◎ Lug type, High stability
- ◎ Low leakage current reduces battery consumption
- ◎ Used for photo flash



## Specifications

Item	Characteristics	
使用温度范围 Operating Temperature Range(°C)	-20 ~ +55	
额定电压 Rated Voltage (V)	330WV.DC	360WV.DC
耐压 Voltage Proof (V)	350SV.DC	390SV.DC
标称容量 Nominal capacitance (µF)	150 ~ 1500	
容量偏差 Capacitance Tolerance(20°C,120Hz)	-10% ~ +20%	
损耗角正切值 Dissipation Factor(20°C,120Hz)	$\tan\delta \leq 0.25$	
损耗角正切值 Dissipation Factor(20°C,120Hz)	150 ~ 600µF : Less than 0.1 700 ~ 1500µF : Less than 0.15	
漏电流 Leakage current (µA)	I = 1XC (at 20°C, 5minues) Max I : Leakage Current (µA) C : Nominal Capacitance (µF)	

## Dimensions mm

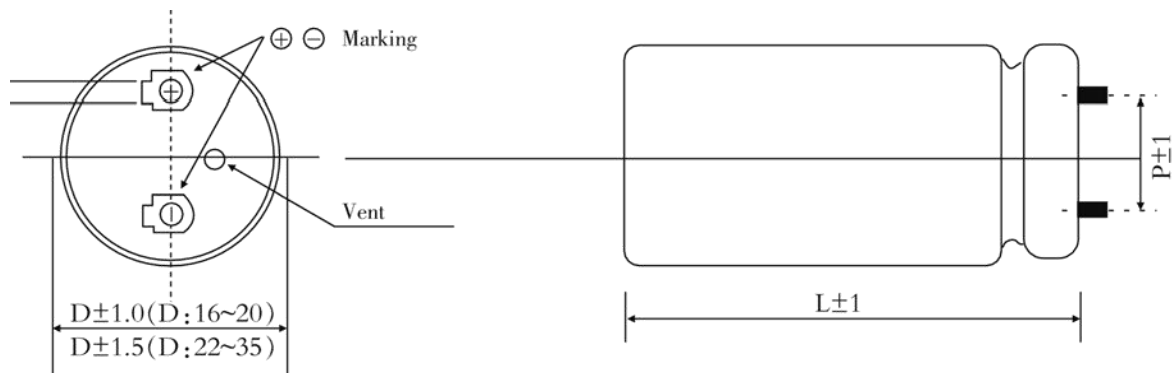

Features

● 330WV.DC(350SV.DC)

Capacitance	ΦD (mm)	16	18	20	22	25	30	35
(μF)	P	6.0	6.0	8.0	8.0	10.0	10.0	10.0
150	L (mm)	28	23	-	-	-	-	-
180		32	23	-	-	-	-	-
200		35	28	24	-	-	-	-
250		42	35	29	26	-	-	-
300		48	40	33	28	-	-	-
350		56	45	38	31	-	-	-
400		-	48	42	35	30	-	-
450		-	56	45	38	32	-	-
500		-	-	48	42	34	-	-
600		-	-	56	48	40	31	-
700		-	-	-	56	44	34	-
800		-	-	-	-	50	38	-
900		-	-	-	-	54	42	-
1000		-	-	-	-	58	44	36.0
1200		-	-	-	-	-	54	43.0
1300		-	-	-	-	-	58	45.0
1500	-	-	-	-	-	64	51.0	

● 360WV.DC(390SV.DC)

Capacitance	ΦD(mm)	16.0	18.0	20.0	22.0	25.0	30.0	35.0
(μF)	P	6.0	6.0	8.0	8.0	10.0	10.0	10.0
150	L(mm)	35	28	24	-	-	-	-
180		40	32	28	-	-	-	-
200		45	35	30	26	-	-	-
250		52	42	35	30	-	-	-
300		-	48	40	35	30	-	-
350		-	-	45	40	32	-	-
400		-	-	52	42	35	-	-
450		-	-	-	48	40	-	-
500		-	-	-	56	44	34	-
600		-	-	-	-	50	38	-
700		-	-	-	-	58	44	-
800		-	-	-	-	-	50	38.0
900		-	-	-	-	-	54	43.0
1000		-	-	-	-	-	58	48.0
1200		-	-	-	-	-	70	55.0
1300		-	-	-	-	-	-	59.0
1500	-	-	-	-	-	-	71.0	